– DELINEATORS, IF LOW SPEED CURB DEFINES EDGE NOT NEEDED

$L = \frac{WS^2}{60}$

FOR 30mph, L=165
35mph, L=225
40mph, L=293

d = 460' FOR 30mph
= 565' FOR 35mph
= 670' FOR 40mph

d/4 = 115' FOR 30mph
= 141' FOR 35mph
= 168' FOR 40mph

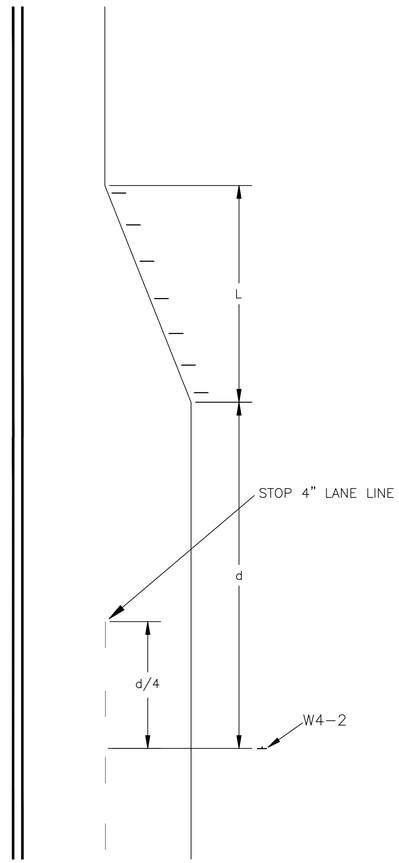

LANE REDUCTION TRANSITION MARKING

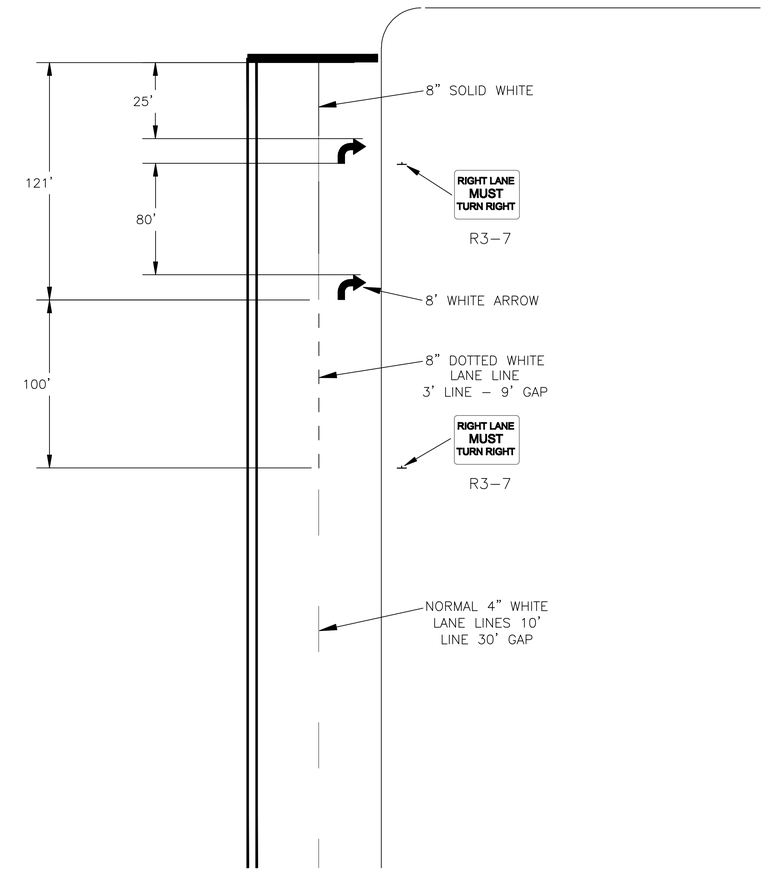

LANE DROP - WHEN THRU LANE BECOMES MANDATORY TURN LANE

NO.	DATE:	REVISION	BY:	APP'D
1	01/30/12	UPDATE SPECIFICATIONS	KAP	LGV

DRAWN BY: K.PELTON

APP'D BY: Linda Lloyd

TOPEKA Public Works
ENGINEERING
620 SE MADISON STREET • 2nd FLR. • TOPEKA, KS 66607
Phone: (785) 368-3842 • Fax: (785) 368-3891

PAVEMENT MARKING

DATE:

PAGE: OF

DRAWING: DT–117

PROJ.